

Trilogy[®] Mortise Locks

by  **ALARM LOCK**

DL3500 Series

Advanced High-Security Electronic Mortise Digital Locks
with Audit Trail & Timed Locking



Features

- 300 User codes: Master, manager, supervisor & basic users.
- All Trilogy Mortise Lock Models are weatherproof and operate from -20 to 151 degrees F (-29 to 66 degrees C)
- Fingertip- or Windows PC-Programmable
- Real-Time clock enables up to 500 scheduled events and holiday schedules.
- 40,000 Event audit trail provides a printed time/date-stamped log of all electronic activity.
- Audit Trail Polling to Data Transfer Module to PC or direct to PC with use of ALPCI2-U cable.
- Standalone access control system with long-life batteries and low battery alert.
- Choose either left or right-handed, Classroom or Deadbolt function models.
- Exceptionally durable with both strong clutch mechanism and stainless steel latchbolt and deadbolt (where applicable).
- 'Quick Passage' Mode enabled with any authorized user codes and function code (does not require lock be in program mode)
- Available in two finishes; 26D and 10B.
- Available in standard Trilogy leverset (straight) or with new Regal (curved) handle trim, shown at right



Advanced "Smart" Applications

Scheduled Events: Program to lock/unlock; disable/enable users; 4 built-in time schedules

Adult Trial with Time/Date Stamp: Provides a printable record of all electronic activity, including, Unlock/lock events, program mode changes, user entry, keypad lockout, remote release events, unauthorized code attempts, etc.

- 4 Programming Levels
- 4 User Groups
- 3 to 6 Digit Codes
- One-Time Service Code
- Total User Lockout Code
- 'First-Manager-In' Feature Set
- All-Time panic exit function from within premises. From the inside of the door, a single turn of lever simultaneously releases latchbolt and deadbolt (where applicable).
- Tri-colored LED indicator indicates code acceptance or denial (green or red, respectively), or low battery condition (yellow).
- Non-volatile memory of both programming and audit trail activity
- Keypad lockout after numerous attempts to "guess" codes
- Programmable Form C Relay functions for scheduled on manual control of CCTV, lighting, ambush function, alarm system, etc.
- Standard ANSI 115.1 Mortise prep modified with added though-bolt holes.

Specifications

Operations: Authorized digital code enables outside lever to retract latchbolt, deadlocking latch & deadbolt (where applicable). Inside lever is always in passage mode and permits instant egress.

Operating Temperature: Weatherproof lock operating range from -20 to 151 degrees F (-29 to 66 degrees C)

Keypad: Weatherproof all-metal, 12-button programmable for multi-level access functions.

Programming: Locking modes, event schedules, group or individual user codes, master and management codes, passage & emergency or service code, lockout and remote override capacity and allowable entry time (3, 10, or 15 seconds), etc. are programmable through the keypad, from the Data Transfer Module (AL-DTM) or using any PC running Alarm Lock DL-Windows Software

Audit Trail: Locks' entry activity log can be polled to the Data Transfer Module (AL-DTM) or PC using DL-Windows Software.

Power: 5AA alkaline batteries, furnished. Audible low battery alert, visual and audible entry indicators, 80,000 cycles, typical.

Door Thickness: Standard 1 3/4" (4.46cm) thickness. (Accepts 1 3/8" to 1 7/8" or 3.5 to 4.7cm).

Backset: 2 3/4" (7.01 cm)

Door Prep: Standard ANSI 115.1 Mortise prep, modified with added through-bolt holes.

Cylinder: 1 3/8" (3.5 cm) mortise cylinder supplied.
1 3/8" - 1 - 1 1/2" (3.5 - 3.82cm) mortise cylinders accepted.
Classroom Models are supplied with cylinder with straight cam.
Deadbolt Models are supplied with cylinder with cloverleaf cam.

Classroom Models: Feature stainless steel latchbolt with 3/4" (1.91cm) projection and deadlocking latch.

Deadbolt Models: Feature stainless steel deadbolt with 1" (2.55cm) projection, latchbolt with 3/4" (1.91cm) projection and deadlocking latch. Deadbolt may be projected from key cylinder from outside door or turn-piece from inside door.

Interchangeable Cores: Will accept interchangeable core mortise cylinders with compatible cams. Call factory for details.


Trim: Handed. Standard Trilogy Handle Lever set (squared) or optional Regal curved lever handle.

Handing: Left (L) or Right (R) Handed Models must be specified upon ordering. Trim is non-handed. Lock body is field reversible.

Strike: ASA Strike supplied, matched to classroom or deadbolt function model and lock handing. standard strike is 4 7/8" (12.43cm) and includes combination wood/metal screws.

Finishes: US 26D Satin Chrome or US 10B Durondic

Compliances: Steelcase lockbody meets BHMA specifications for Grade 1 locks. UL Listed to the 10C Positive Pressure Specifications. Latchbolt is UL Listed, and 3-hour rate fired. FCC Certified. ADA compliant levers.

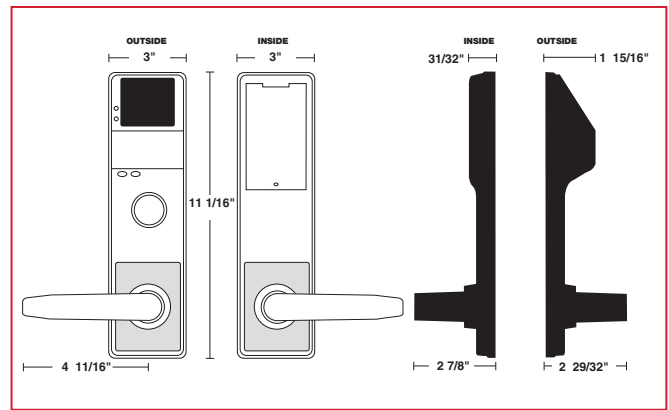

Also Available:

- Cylindrical Models DL4100 & Prox/PIN Lock PDL4100
- Prox/PIN Mortise Lock PDL3500CR/DB
- Privacy Mortise Lock DL4500DB & Prox/PIN PDL4500DB

Mortise Trilogys					
DL	35	00	DB	R	/26D
Model & Series: DL35 = Trilogy T3 Mortise Series					
Trim: 00 = Standard Lever 75 = Regal Curved Lever (U.S. Option Only)					
Lock Body: DB = Dead Bolt CR = Class Room (U.S. Only)					
Handing: Your Door - Order - Left Handed L Right Handed R Left Hand Reverse Bevel R Right Hand Reverse Bevel L					
Finish: /26D= US26D Satin Chrome /10B= Durondic					

(Note: Trim is non-handed. Lock body is field reversible.)



Trilogy® Mortise Locks

by  **ALARM LOCK**

Trilogy Lock Accessories



AL-PRE2 Prox Card Reader/Enroller
Enables instant, automatic enrollment of Prox cards, keyfobs, tags into DL-Windows (Simply present the prox Card/fob device to the unit's faceplate to enroll—no need to be in the presence of the lock while enrolling—eliminates the need for keyboarding each badge's number). Supports all Prox cards, keyfobs and tags. Simultaneous card enrollment, downloading or uploading - all on just one serial port. 9V Battery operation.



AL-DTMIII Data Transfer Module
used to transfer program data from the PC (running DL-WINDOWS software) to the lock and receives audit trail from the lock. Can store data for up to 96 locks at a time.



AL-PCI2-U USB interface cable allows communication directly between your PC and lock. DL-Windows software included.



DL-WINDOWS Upgrade for Trilogy software version (software only). (Contained in two items above.)

BHMA
Builders Hardware
Manufacturers Association 
ADA

Trilogy is available in many additional models, including those for outdoors, &/or Mortise, exit trim panic devices, plus with Prox ID card reader, dual-sided keypads, wireless lock networks and more.

Some Other Trilogy Options:

DL2700LD With LocDown™ Indicator Light Bar & Keyfob

DL2700CR T2 Mortise, Classroom version

DL2700DB T2 Mortise, Deadbolt version

DL1200 Models for Narrow Stile Glass Doors

DL1200ET T2 Narrow Stile Exit Trim for use with Panic Devices (generic rim cyl. supplied)

ETDL27 T2 Exit Trim for use with Panic Devices (generic rim cyl. supplied)

DL5200 Dual-Sided PIN Lock

RR-TRILOGYKIT Optional Remote Release Kit

RR-MORTISEKIT Optional Remote Release Mortise Kit

See Trilogy Network™ Locks for wireless network capabilities



Alarm Lock Systems, LLC (A Division of NAPCO Security Technologies, Inc.)
333 Bayview Ave, Amityville, New York 11701

1-800-ALA-LOCK • ++ 631.842.9400 • www.alarmlock.com • salesinfo@alarmlock.com
Trilogy™ T2 and LocDown are trademarks of NAPCO. Other trademarks listed are those of their respective companies.
Some preliminary specifications subject to change without prior notice. © NAPCO 2026.9 ALA151C